


*ITALIAN QUALITY PRODUCT*



Custom cold  
rooms shaped.

**COM-CS**

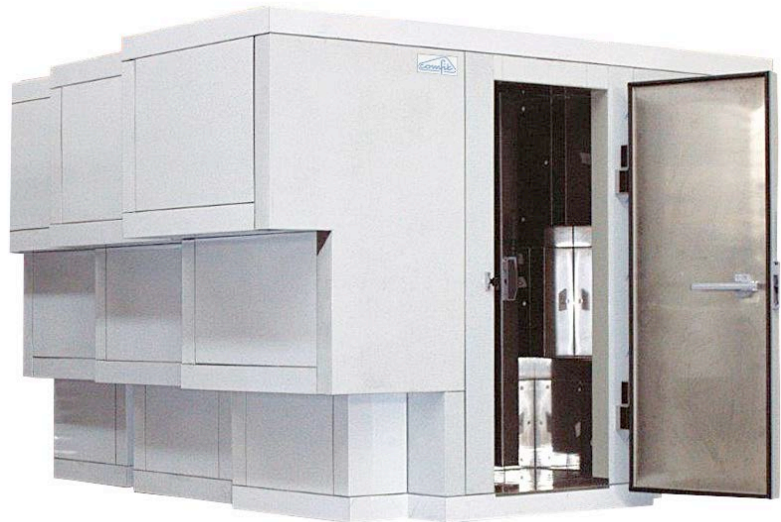

**COMFIT srl**  
Via Viberti, 4  
10141 Torino - Italy  
T. +39 011 720085  
F.+39 011 728870  
[comfit@tiscali.it](mailto:comfit@tiscali.it)  
[www.comfit.org](http://www.comfit.org)

Subject to change without notice  
the technical characteristics of  
the products shown. All rights  
reserved. COMFIT srl, 05/2014

*Aria nuova in laboratorio...*


# ITALIAN QUALITY PRODUCT

Our flexibility in design and production allows us to make cold rooms shaped, customized on the needs of the customer.

## Insulation


High density polyurethane foam 40-42 kg/mc, fire retarding according ISO 3582, CFC free.

Thermal conductivity coefficient Lambda  
0,021W/mq °K  
Transfer coefficient K.  
Thicknesses 70 mm 3,30 W/mq °K  
Thicknesses 100 mm  
0,21 W/mq °K  
Thicknesses 130 mm  
0,16 W/mq °K  
Compression resistance  
1,5 – 2 Kg/cmq



## Height panels

Standard cm 203-223-243-263-283-303-323  
They are panels with heights of mesurement.

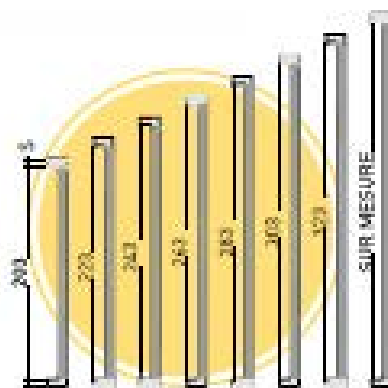

## Interior partitions.

May be:  
Movable dividing.  
Cam locks dividing.



## COMFIT srl

Via Viberti, 4  
10141 Torino - Italy  
T. +39 011 720085  
F.+39 011 728870

[comfit@tiscali.it](mailto:comfit@tiscali.it)  
[www.comfit.org](http://www.comfit.org)

Subject to change without notice the technical characteristics of the products shown. All rights reserved. COMFIT srl, 05/2014

*Aria nuova in laboratorio...*

# ITALIAN QUALITY PRODUCT

## Inside rounded corners

It is possible to produce panels with rounded corners both for floor and walls.



## Locking panels.

Male -Female nesting.  
Connection with dual effect cam locks.



## Type flooring cold rooms.

Galvanized steel sp. 7/10 mm thick with non-slip grey plating coating walk-in static load 2000kg/mq.

Stainless steel sheet 18/10 AISI 304 sp 6/10 mm.

Stainless steel sheet 18/10 AISI 304 no-slip punch thick 6/10 mm walk-in static load 2000kg/mq.

Suitable for trolley 250 kg reinforced with 10 mm fenolic multistratified wood.

Suitable for trolley 1000 kg reinforced with 12 mm fenolic multistratified wood, wood beams support 3 mm aluminium sheet cover.



## Panels finishing.

Galvanized sheet steel sp. 6/10 with plastic coating in rigid white PVC 120 micron thick non toxic.

Galvanized sheet with plastic coating in different colours.

Stainless steel sheet 18/10 AISI 304 sp 6/10 mm scotch brig/dull external, natural finish inside.



## COMFIT srl

Via Viberti, 4  
10141 Torino - Italy  
T. +39 011 720085  
F. +39 011 728870

[comfit@tiscali.it](mailto:comfit@tiscali.it)  
[www.comfit.org](http://www.comfit.org)

Subject to change without notice the technical characteristics of the products shown. All rights reserved. COMFIT srl, 05/2014

*Aria nuova in laboratorio...*



# ITALIAN QUALITY PRODUCT

We present some types of doors  
for cold rooms.

## Doors for cold rooms.

Access door - service door.



Sliding door.



Steel sliding door with electric  
opening.



**COMFIT srl**  
Via Viberti, 4  
10141 Torino - Italy  
T. +39 011 720085  
F.+39 011 728870  
[comfit@tiscali.it](mailto:comfit@tiscali.it)  
[www.comfit.org](http://www.comfit.org)

Subject to change without notice  
the technical characteristics of  
the products shown. All rights  
reserved. COMFIT srl, 05/2014

*Aria nuova in laboratorio...*